


Pour Stop Gage Selection Table

SLAB DEPTH (IN)	OVERHANG (INCHES)												
	0	1	2	3	4	5	6	7	8	9	10	11	12
4.00	20	20	20	20	18	18	16	14	12	12	12	10	10
4.25	20	20	20	18	18	16	16	14	12	12	12	10	10
4.50	20	20	20	18	18	16	16	14	12	12	12	10	10
4.75	20	20	18	18	16	16	14	14	12	12	10	10	10
5.00	20	20	18	18	16	16	14	14	12	12	10	10	
5.25	20	18	18	16	16	14	14	12	12	12	10	10	
5.50	20	18	18	16	16	14	14	12	12	12	10	10	
5.75	20	18	16	16	14	14	12	12	12	12	10	10	
6.00	18	18	16	16	14	14	12	12	12	10	10	10	
6.25	18	18	16	14	14	12	12	12	12	10	10		
6.50	18	16	16	14	14	12	12	12	12	10	10		
6.75	18	16	14	14	14	12	12	12	10	10	10		
7.00	18	16	14	14	12	12	12	12	10	10	10		
7.25	16	16	14	14	12	12	12	10	10	10			
7.50	16	14	14	12	12	12	12	10	10	10			
7.75	16	14	14	12	12	12	10	10	10	10			
8.00	14	14	12	12	12	12	10	10	10				
8.25	14	14	12	12	12	10	10	10	10				
8.50	14	12	12	12	12	10	10	10					
8.75	14	12	12	12	12	10	10	10					
9.00	14	12	12	12	10	10	10						
9.25	12	12	12	12	10	10	10						
9.50	12	12	12	10	10	10							
9.75	12	12	12	10	10	10							
10.00	12	12	10	10	10	10							
10.25	12	12	10	10	10								
10.50	12	12	10	10	10								
10.75	12	10	10	10									
11.00	12	10	10	10									
11.25	12	10	10										
11.50	10	10	10										
11.75	10	10											
12.00	10	10											

Gage	Thickness
20	0.0396
18	0.0516
16	0.0635
14	0.0785
12	0.1084
10	0.1392

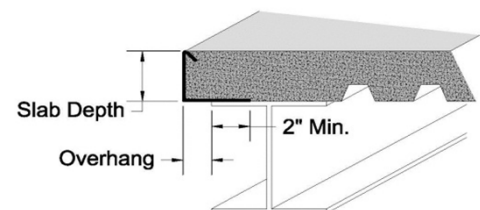

MFS
Metal Fabrication Services

EBERL
IRON WORKS, INC.